



Manhole Covers Ireland

We cover everything!

Lowpark, Charlestown, Co. Mayo, Ireland.

Phone 094 9033 022 Fax 094 925 4970

Email: info@mhcireland.com web Site www.mhcireland.com

V100.00 Polymor Concrete Channel with Galv Edge

E600 Ductile Iron Grating



Sump Unit 500mm



Closing End Cap




Outlet Endcap

APPLICATIONS:

- Building entrances
- Service stations
- Car parks
- Pedestrian precincts
- Kerbside drainage
- Slow moving light commercial vehicles
- All Types of Heavy Goods Vehicles.

CHANNEL MATERIAL SPECIFICATION:

- n Resistance to bending: 22 MPa
- n Resistance to compression: 90 MPa
- n Resistance to heat: 70°C (resin HDT)

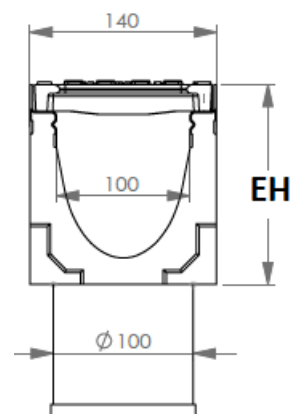

The polymer concrete drainage channel is a genuine all-round talent. Thanks to its high-strength steel edge and the longitudinal fixation lugs of the gratings, the drainage system is suitable for practically every application.

For use on industrial areas, Commercial Developments, Retail developments, Footpath drainage, Petrol Forecourt, Residential developments, Schools and all types of Heavy goods Vehicles etc.

- Loading class up to E600
- Edge made of 4 mm galvanised steel
- Grating Locked in position with 4no Bolts per 500mm
- * Clear width 100mm
- * 100mm Knockout Bottom Outlet

Product Code	Length(mm)	Internal Width(mm)	External Width	Internal Height	External Height (EH)
Slotted 8mm AntiHeel Grating					
MH-DC-E-V100.00-HS	1000	100	140	120	150
MH-DC-E-V100.10-HS	1000	100	140	170	200
MH-DC-E-V100.20-HS	1000	100	140	220	250
MH-DC-E-V100.30-HS	1000	100	140	270	300